




A PLAYCORE Company



Model # 348SH-R8

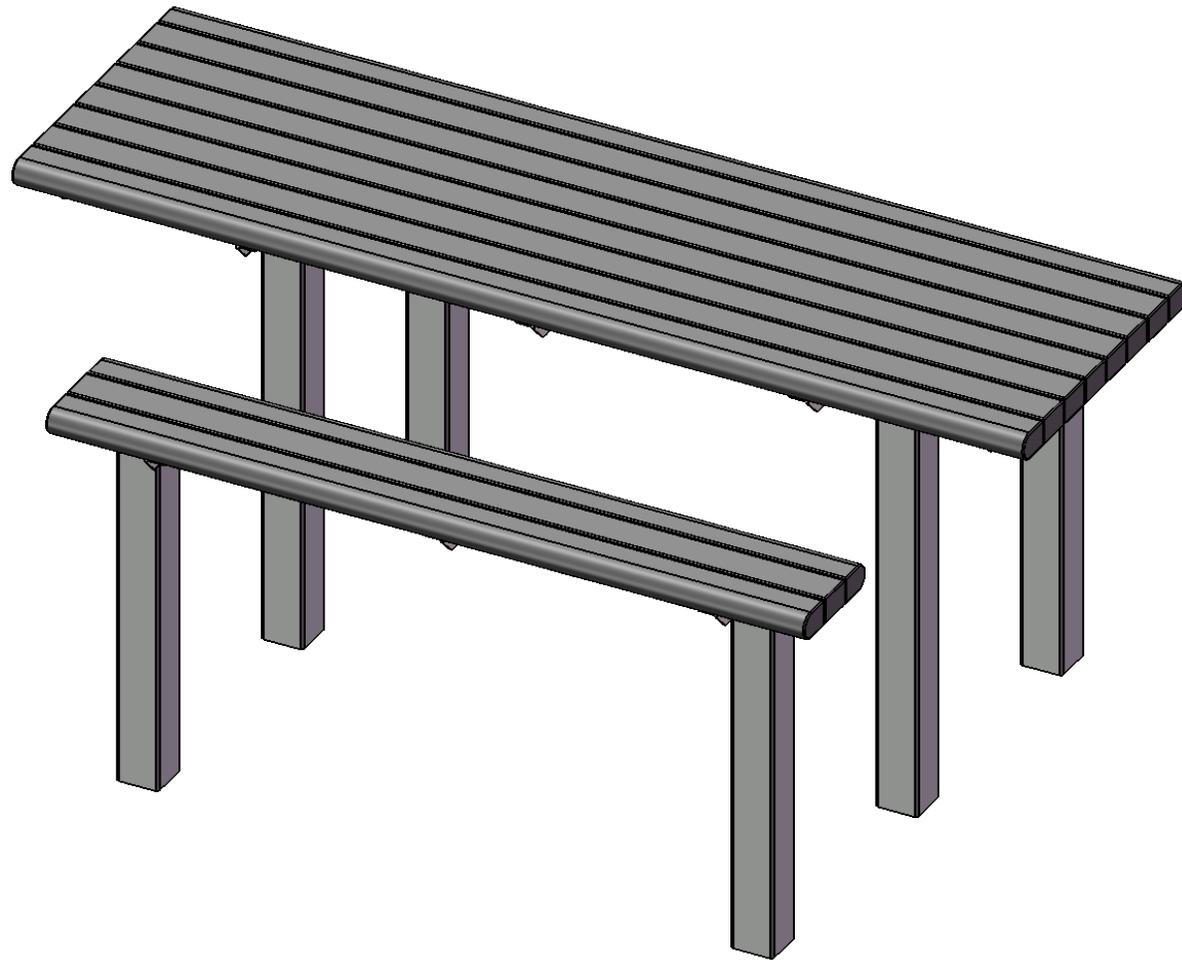

A PLAYCORE Company


## **SAFETY WARNINGS & EQUIPMENT INSPECTION**

- Owners and installers please note these safety warnings and make use of this checklist on a regular basis.
- Follow installation instructions when erecting equipment.
- Ground surfaces around equipment should be restored as needed. Concrete footings should never be exposed. Surface depth should comply with ASTM and CPSC specifications.
- Check for and repair damage caused by wear or vandalism, a major factor in injury causing situations.
- All protruding bolts should be covered or cut off and finished smooth. Sharp edges on pipes should be capped or removed. Check for bent, broken, or severely worn pipe, and replace.
- All equipment should be free of rust and repainted whenever necessary to deter rusting.
- We provide our customers with layout sheets and installation instructions. Please keep on file the specifications sheet that contains the listing of every part used.
- Never add components not intended for use with this product.
- Regular maintenance is necessary in this and all park and recreational equipment to insure the safety of the user.
- Note: Proper maintenance of equipment requires regular tightening of all bolts, nuts, and setscrews.
- Note: Regular checking of all parts, castings, etc. should be made. If a part is broken or worn, it should be replaced immediately.
- Check to be sure all fittings are tight and that bars and pipes do not move.
- Replace all worn S-hooks. S-hooks must be completely closed. Failure to close S-hooks can result in serious injury to the user. NEVER reuse S-hooks.
- Test for free movement of swing hanger and other moving attached parts.
- Check for worn chains and replace them.
- A soft resilient surface should be placed under all swings extending at least twice the height of the top rail both front and back.


# HARDWARE



5/16" x 1-1/4"  
Lag Bolt




5/16" Washer




5/16" Hex Nut


## TOOLS REQUIRED

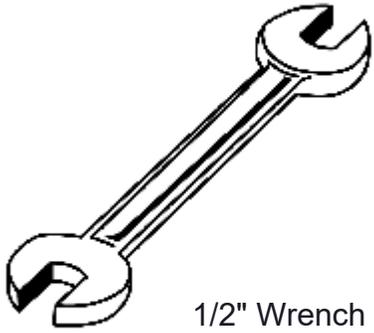


1/2" Wrench

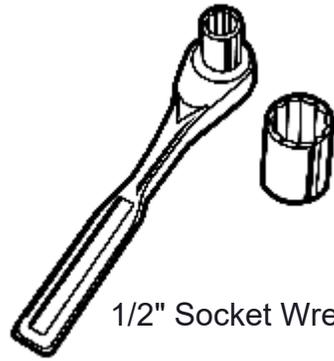

1/2" Socket Wrench

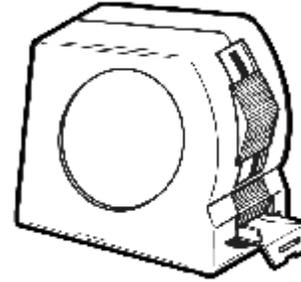

Tape Measure

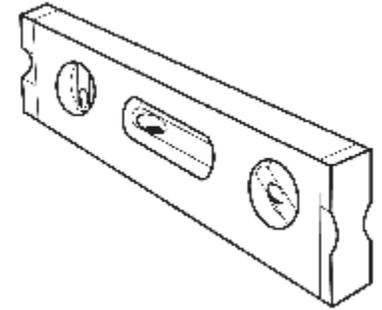

Level

# ULTRA SITE PRODUCT SPECIFICATIONS

## **348SH-R8 8' INGROUND MOUNT ACCESSIBLE PICNIC TABLE WALK-THROUGH DESIGN**

Top & Seats: 3 x 4 planks are made from a minimum of 96% post-consumer or post-industrial recycled plastic. Contains UV stabilizers to prevent fading.


Frame: 4 x 4 x 11 gauge structural steel square tubing. Legs are capped with a 4 x 4 x 3/16" steel flat bar. Seat and top mounting points are 2" x 2" x 7 gauge steel angle. All table top and seat mounting brackets shall be precision punched. All electrically MIG welded.

Frame Coating: TGIC electrostatic powder coated application oven cured.

Hardware: All fasteners are stainless steel.


Dimensions: 8' Inground picnic table walk-through design. Top is 29 3/4" wide x 95" long and is 31 1/16" high from the ground. Seats are 11" wide x 72" long and 19" high from ground. Outside to outside dimension is 63" x 95".

# COMPONENTS

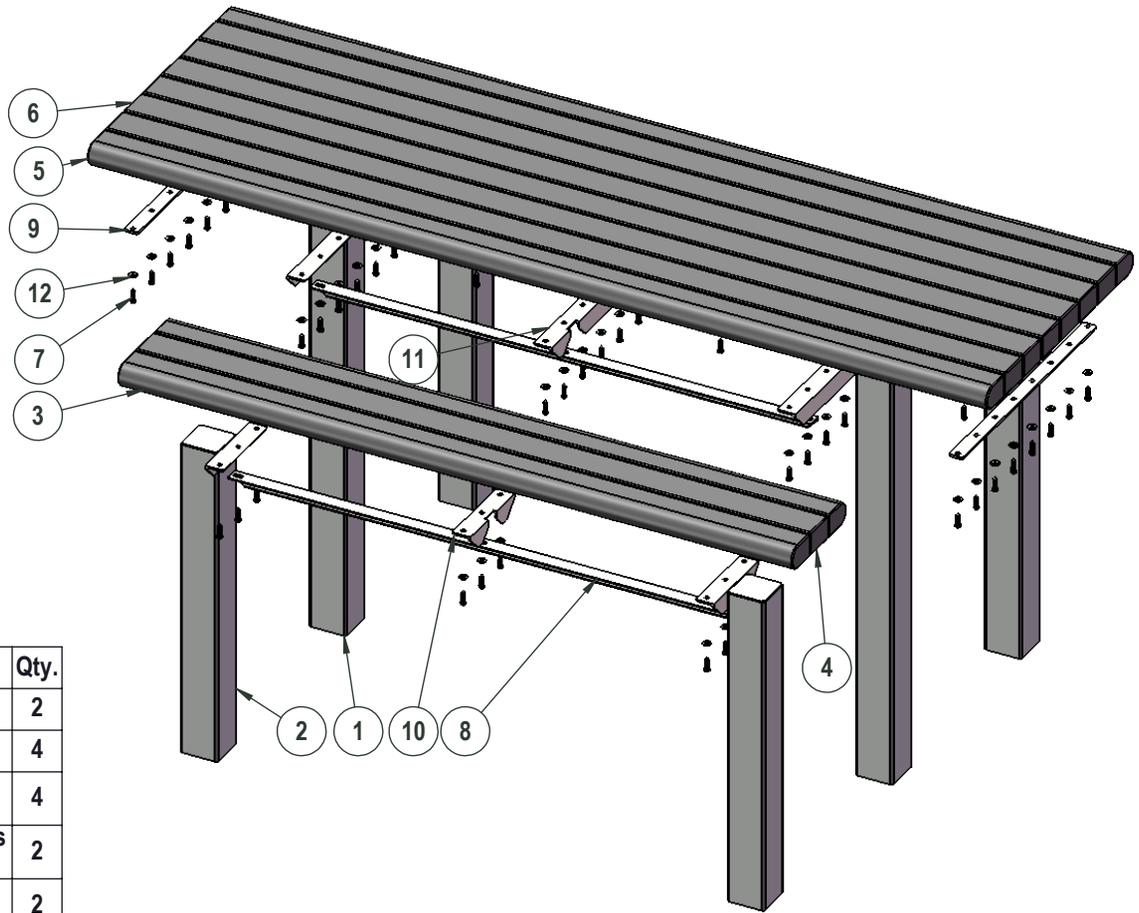


ITEM NO.	PartNo	DESCRIPTION	Qty.
1	P-W348S-T	348S Top Leg	2
2	P-W348S-S	348S Seat Leg	4
3	R72-3X4B-LB	3x4 Bullnose Recycled Seat/Top Plank - lag bolts (6')	4
4	R72-3X4-LB	3x4 Recycled Seat-Seat/Top Plank - lag bolts (6')	2
5	R96H-3X4B-LB	3x4 Bullnose Recycled H Top Plank - lag bolts (8')	2
6	R96H-3X4-LB	3x4 Recycled H Top Plank - lag bolts (8')	6
7	33-05-0034	5/16" x 1-1/4" lag bolt, SS	58
8	01-04-0407	348 6' Support Angle	4
9	01-04-0409	348 ADA Table End Support Plate	2
10	01-04-0406	348 3 board seat angle w/ cutout	2
11	01-04-0405	348 8 board table angle w/ cutout (7ga)	1
12	33-02-0007	5/16" SS Washer	58

# STEP 1

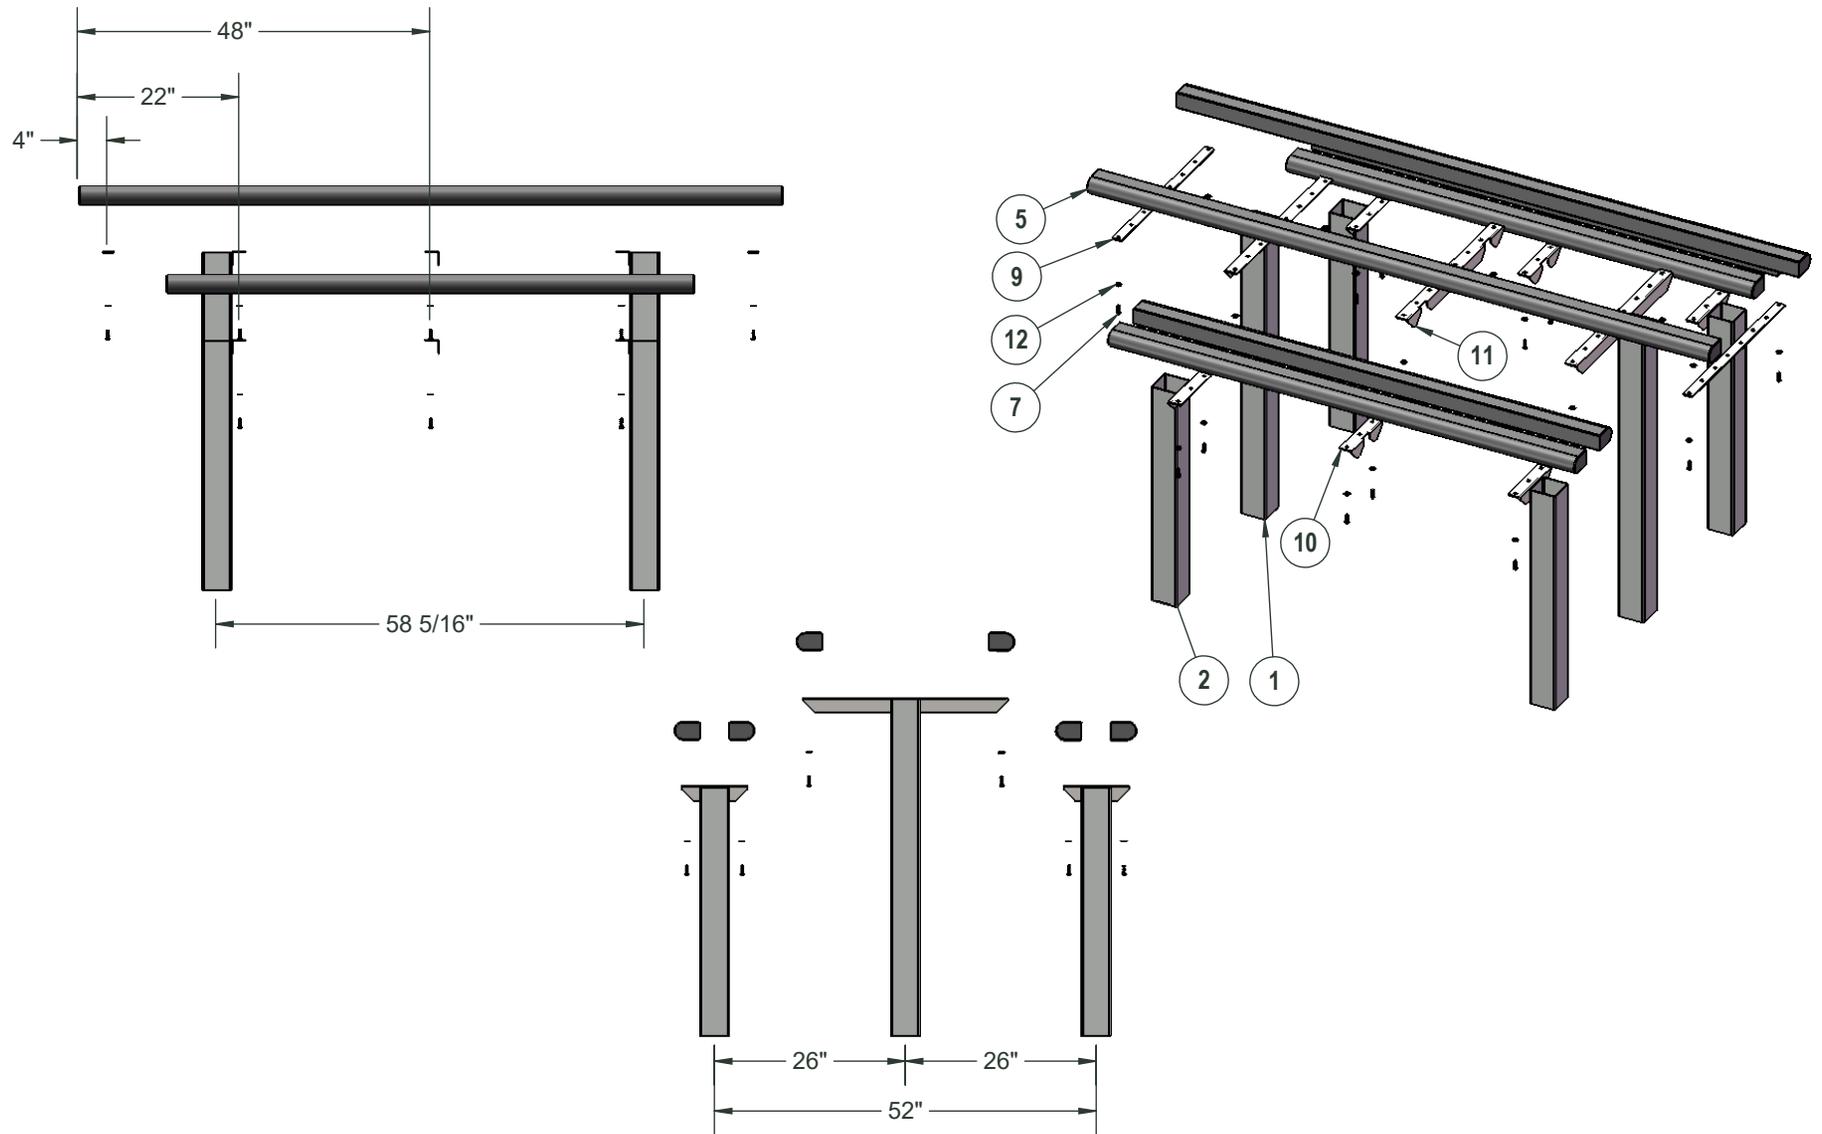


Attach the Bullnose planks to the outside of the legs and then attach the angles with cutouts and the table end support to the planks using the specified hardware.

## STEP 2

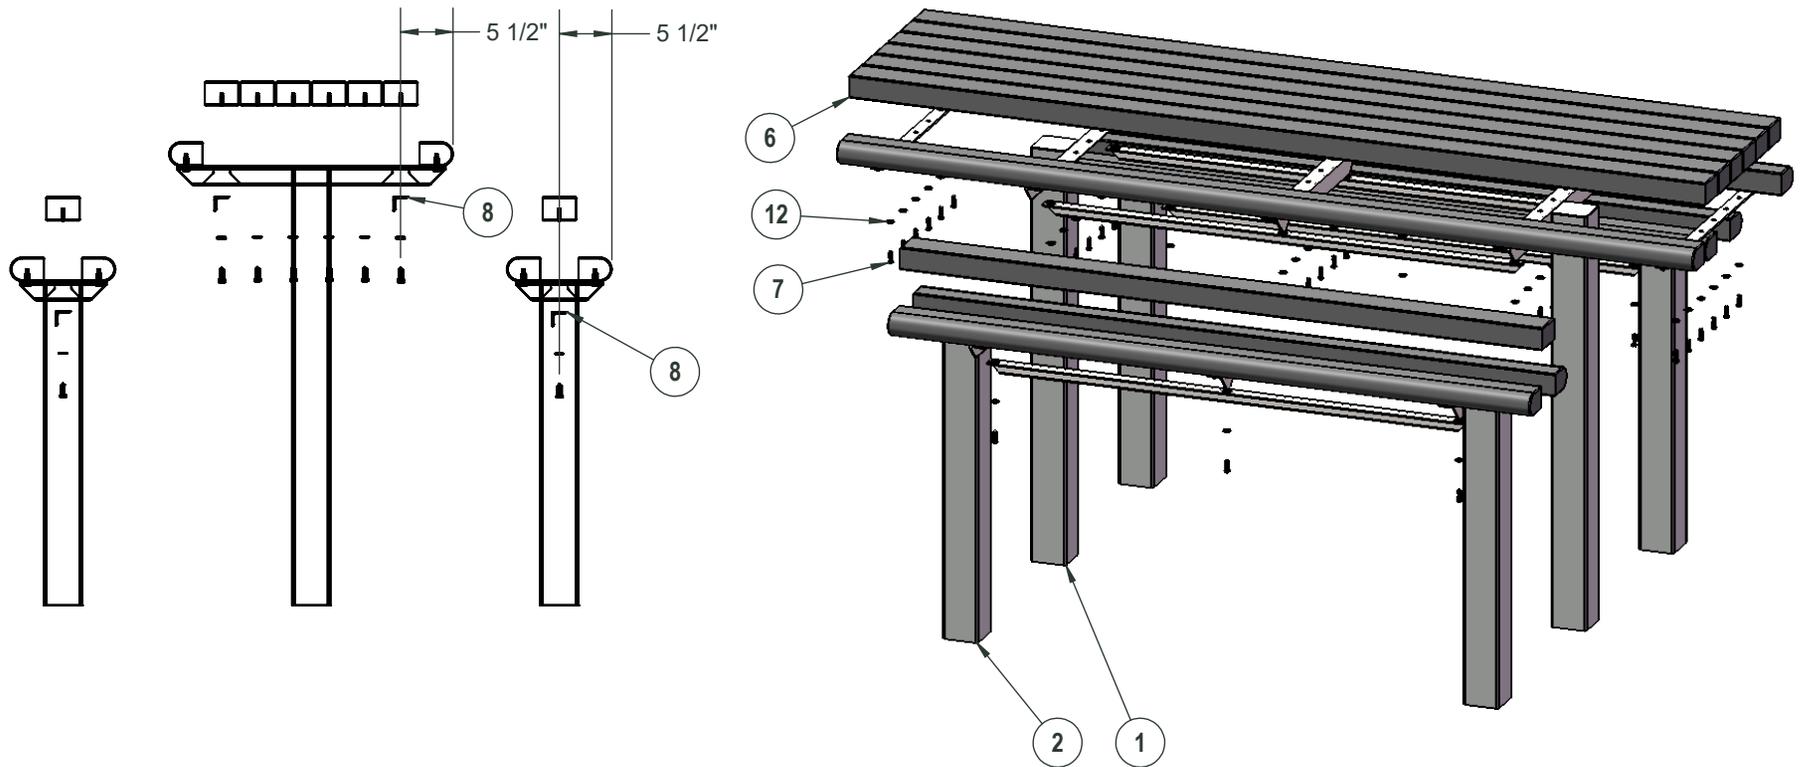

Attach the remaining planks to the legs and attach the 6' support angle to the planks using specified hardware.

# FOOTINGS

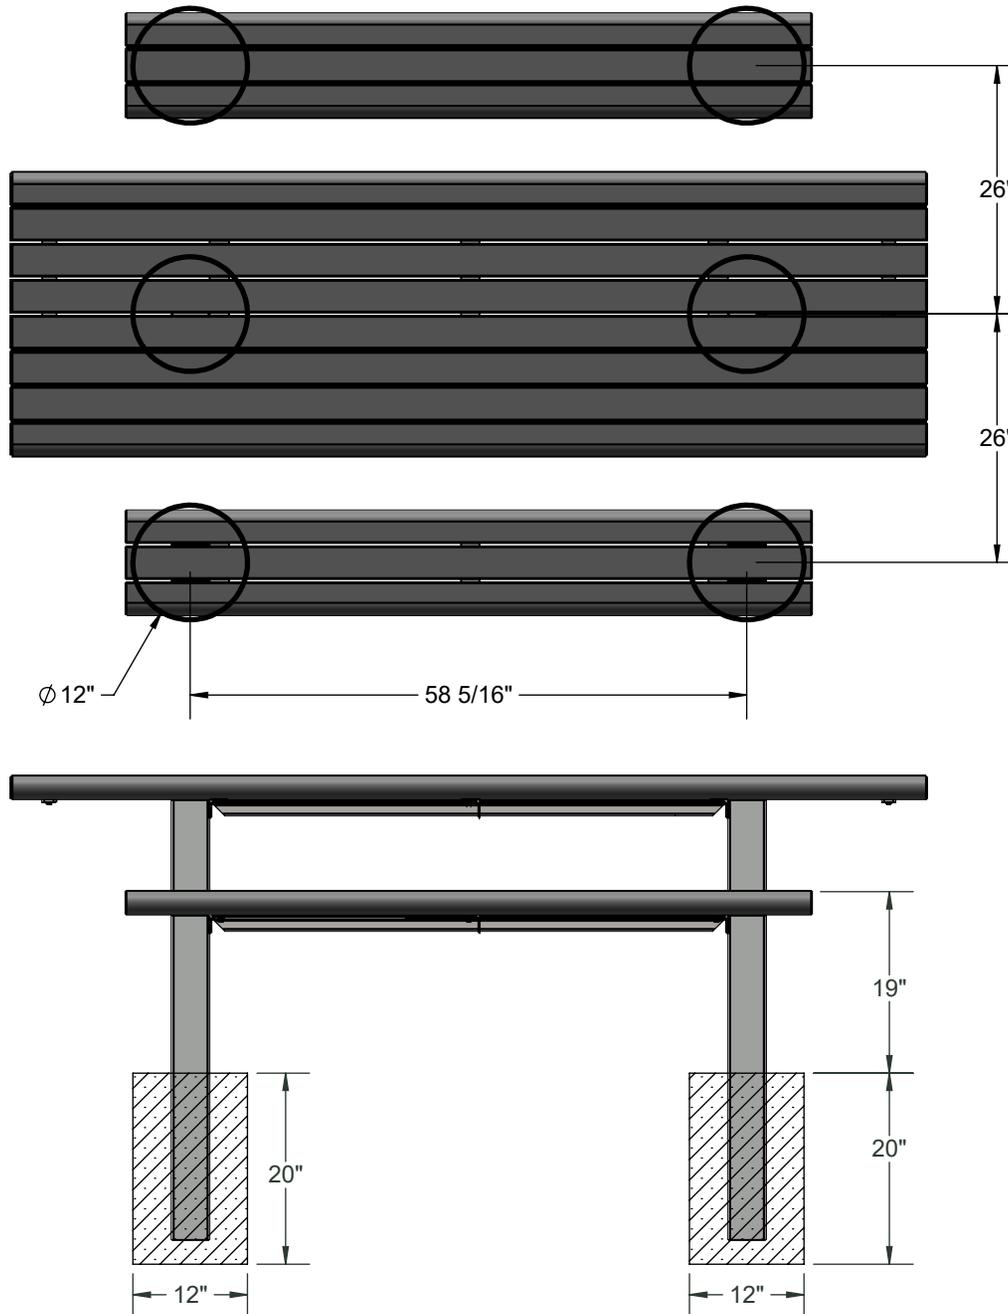

Estimated Required Concrete:  
21- 50 lb Bags of Concrete mix

# OVERALL DIMENSIONS

