




A PLAYCORE Company



Model # 236-A8

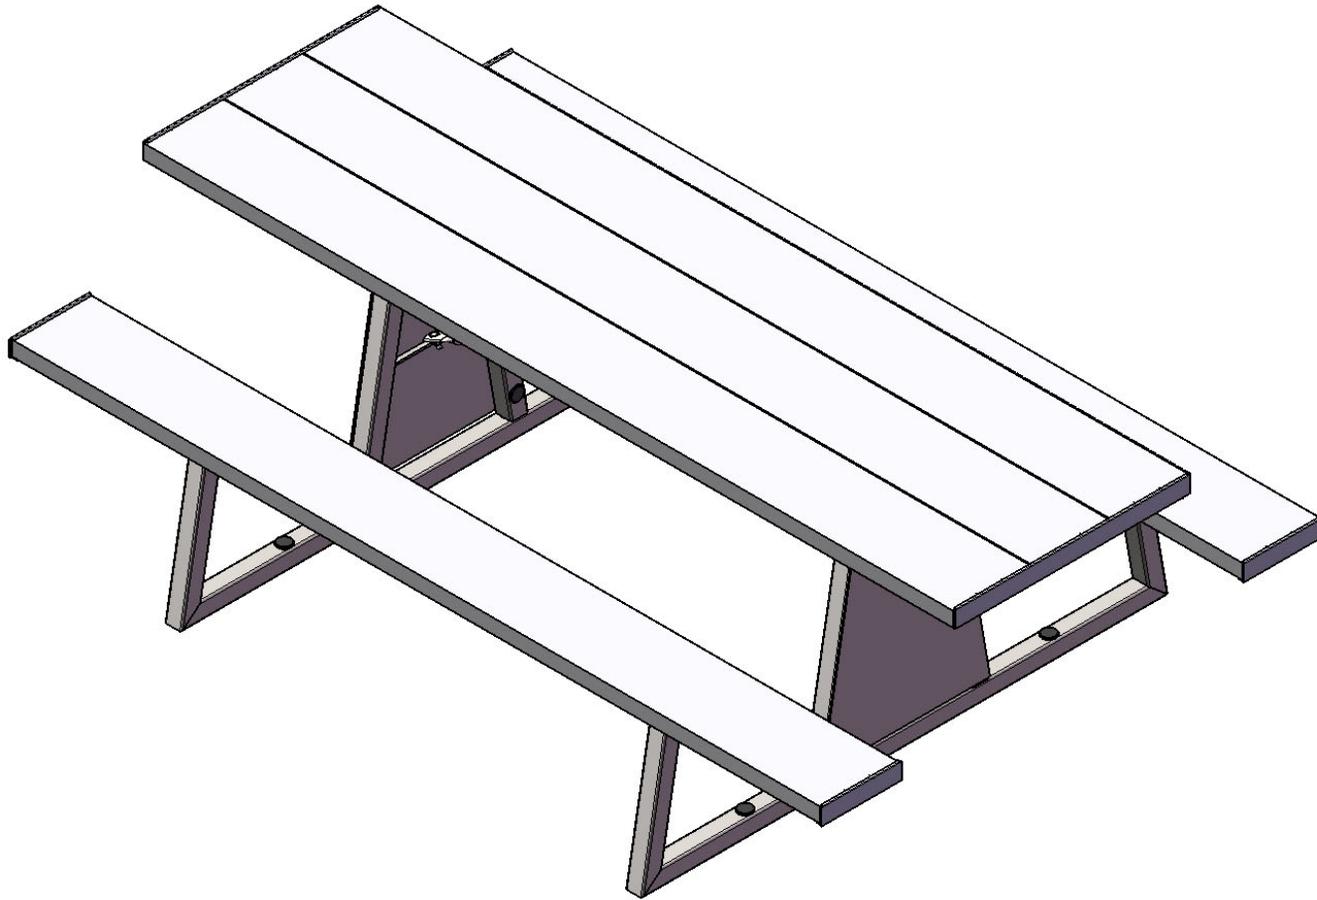


A PLAYCORE Company


SAFETY WARNINGS & EQUIPMENT INSPECTION

- Owners and installers please note these safety warnings and make use of this checklist on a regular basis.
- Follow installation instructions when erecting equipment.
- Ground surfaces around equipment should be restored as needed. Concrete footings should never be exposed. Surface depth should comply with ASTM and CPSC specifications.
- Check for and repair damage caused by wear or vandalism, a major factor in injury causing situations.
- All protruding bolts should be covered or cut off and finished smooth. Sharp edges on pipes should be capped or removed. Check for bent, broken, or severely worn pipe, and replace.
- All equipment should be free of rust and repainted whenever necessary to deter rusting.
- We provide our customers with layout sheets and installation instructions. Please keep on file the specifications sheet that contains the listing of every part used.
- Never add components not intended for use with this product.
- Regular maintenance is necessary in this and all park and recreational equipment to insure the safety of the user.
- Note: Proper maintenance of equipment requires regular tightening of all bolts, nuts, and setscrews.
- Note: Regular checking of all parts, castings, etc. should be made. If a part is broken or worn, it should be replaced immediately.
- Check to be sure all fittings are tight and that bars and pipes do not move.
- Replace all worn S-hooks. S-hooks must be completely closed. Failure to close S-hooks can result in serious injury to the user. NEVER reuse S-hooks.
- Test for free movement of swing hanger and other moving attached parts.
- Check for worn chains and replace them.
- A soft resilient surface should be placed under all swings extending at least twice the height of the top rail both front and back.


HARDWARE

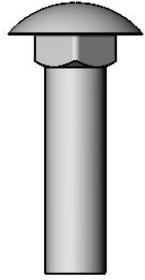


5/16" x 1-1/4"
Carriage Bolt

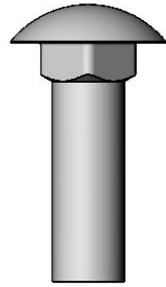


3/8" x 1-1/4"
Carriage Bolt

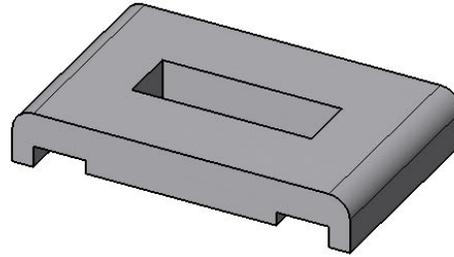

Aluminum Clip




5/16" Washer




3/8" Washer



#8 1/2" SS Philips
Panhead Tek




5/16" Hex Nut



3/8" Hex Nut


TOOLS REQUIRED

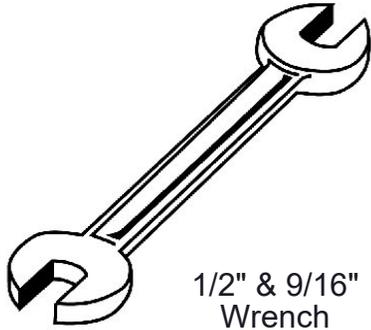


1/2" & 9/16"
Wrench




1/2" & 9/16"
Socket Wrench

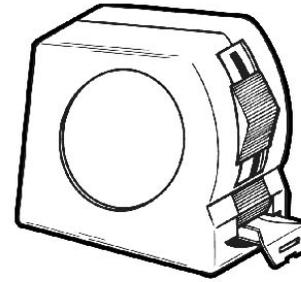

Tape Measure

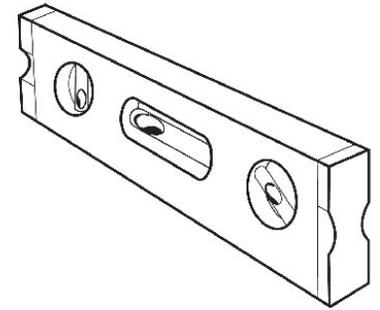

Level

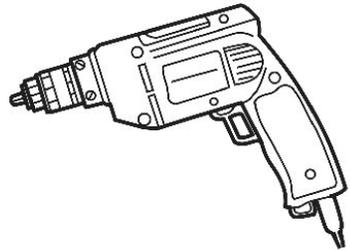

Drill with
Phillips Head Bit

ULTRA SITE PRODUCT SPECIFICATIONS

236-A8 **8' PORTABLE PICNIC TABLE WALK-THROUGH DESIGN**

Top & Seats: Aluminum planking shall be 2"x10" with a minimum thickness of not less than .078 and a fluted non-skid surface. Table and seat planking shall be anodized 6063-T6 extruded aluminum alloy.


Frame: 2" Square x 11 gauge pre-galvanized structural steel tubing. Cross braces 1 5/16" O.D. x 14 gauge pre-galvanized structural steel tubing. Brace attachment points 1-1/2"x1-1/2"x3/16" steel angle. Seat and top mounting points are 2" x 2" x 3/16" precision punched steel angle. All electrically MIG welded.

Frame: Electrostatic powder coated application oven cured.

Hardware: Zinc and Stainless Steel plated fasteners, with aluminum clips.

Dimensions: 8' portable picnic table walk-through design. Top is 28" wide x 96 1/4" long and is 30-3/4" high. Seats are 9-9/16" wide x 96" long and 18-7/16" high. Outside to outside dimension is 59-9/16" x 96 1/4".

COMPONENTS

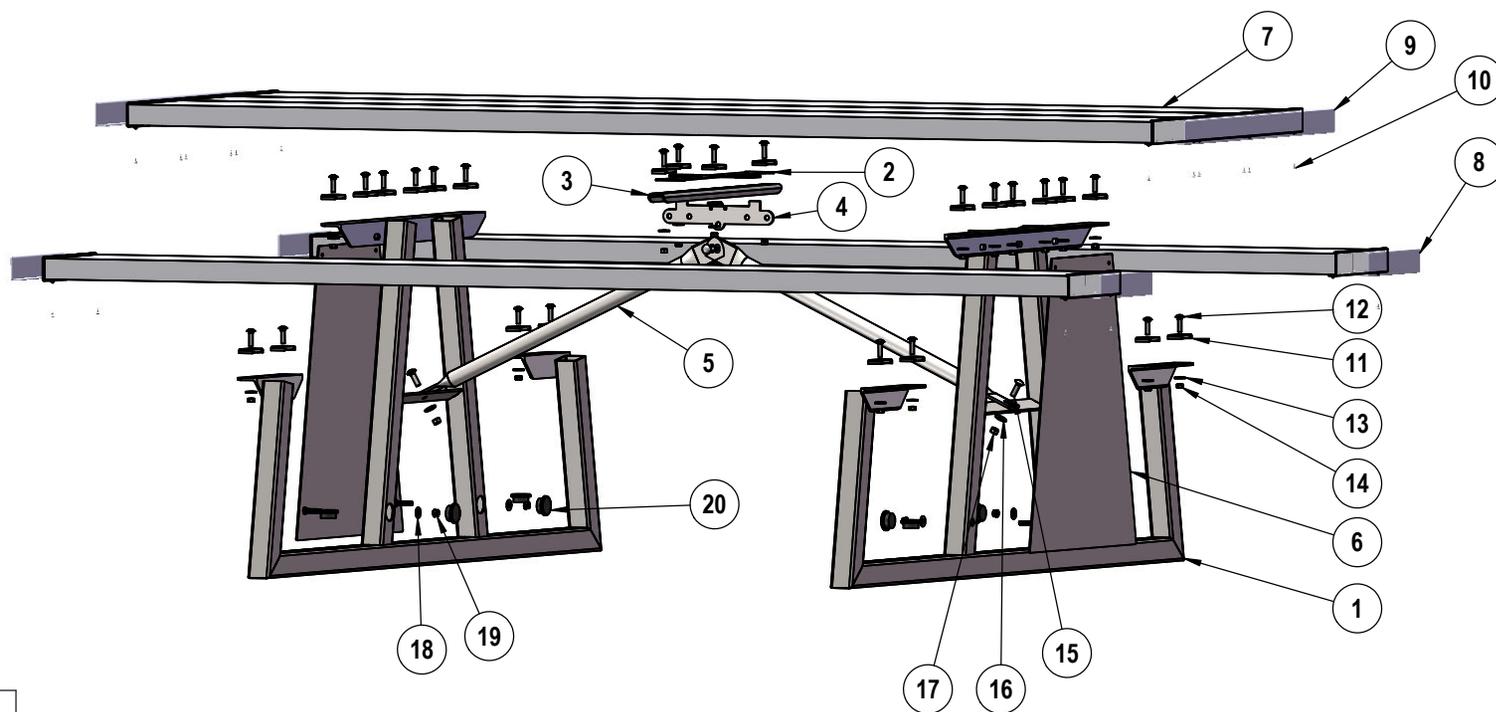

ITEM NO.	PartNo	DESCRIPTION	Qty.
1	01-04-0964	236 wood leg	2
2	01-04-0511	center cross spacer plate	1
3	01-04-0507	center c channel 3 slot (new) (1-1/2" sq x 11ga rectangular tube)	1
4	01-04-0508	wood table center bracket	1
5	01-04-0966	31-7/8" wood brace	2
6	01-04-0967	236 leg end plate	2
7	22-01-0070	2x10x8' Alum. Planking	5
8	22-01-0065	Seat End Cap	4
9	22-01-0066	Top End Cap	2
10	33-05-0008	#8 1/2" SS Phillips Panhead Tek	20


ITEM NO.	PartNo	DESCRIPTION	Qty.
11	22-01-0062	Alum. Planking Clip	24
12	33-06-0001	5/16" x 1-1/4" Carriage Bolt (Zinc)	24
13	33-02-0001	5/16" Zinc Plated Washer	24
14	33-01-0001	5/16" Hex Nut (Zinc)	24
15	33-06-0032	3/8" x 1-1/4" Carriage Bolt (Zinc)	3
16	33-02-0002	3/8" Zinc Plated Washer	3
17	33-01-0002	3/8" Hex Nut (Zinc)	3
18	33-02-0007	5/16" SS Washer	8
19	33-03-0012	5/16" Kee Nut (SS)	8
20	33-08-0004	1-5/8" 14-18 ga. round ribbed insert	12

Optional Surface Mount Hardware:
3/8" x 3-1/2" Concrete Expansion Anchor Bolts
(Not Included)


ALUMINUM PLANK CAP INSTALL

Attach Aluminum End Caps on ends of Aluminum Planks with the specified hardware.
NOTE: The holes in End Cap will go on the bottom side of the planks.

TABLE TOP PLANKS(3)

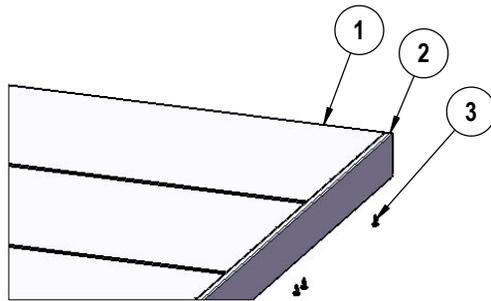


SEAT PLANK

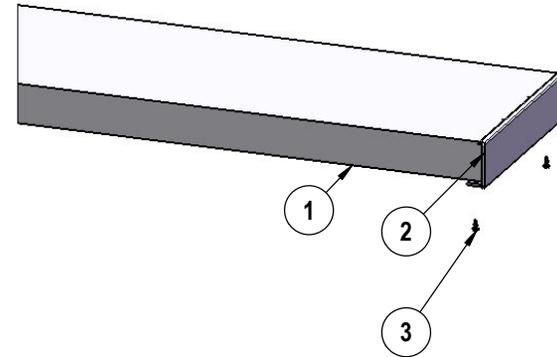


ITEM NO.	PartNo	DESCRIPTION	Qty.
1	22-01-0070	Aluminum 2x10 Plank	1
2	22-01-0065	Seat End Cap	2
3	33-05-0008	#8 1/2" SS Phillips Panhead Tek	4

STEP 1

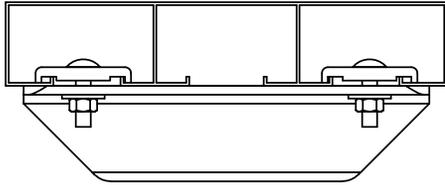


DETAIL A
SCALE 1 : 4

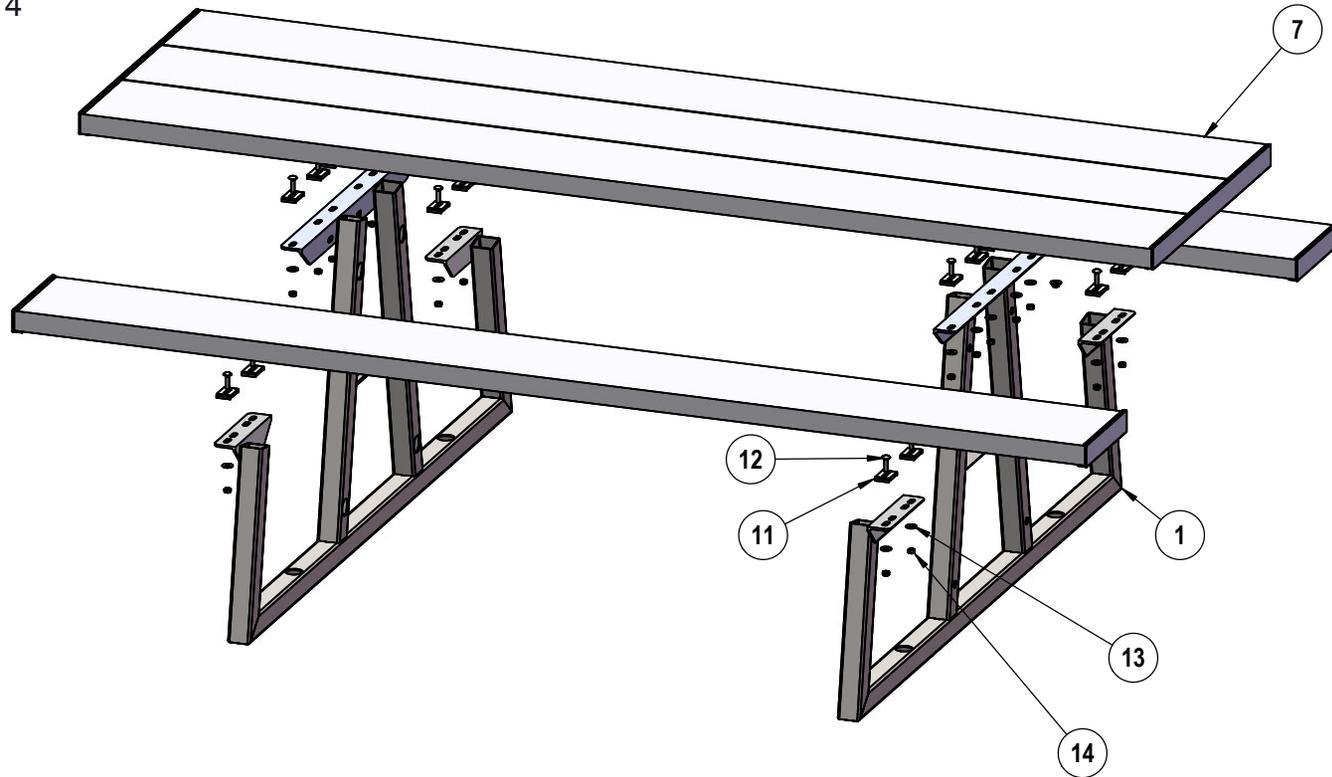


Attach the Aluminum Planks to the legs as shown using specified hardware. Aluminum Clips hang on the inside of the Aluminum Planks.

STEP 2

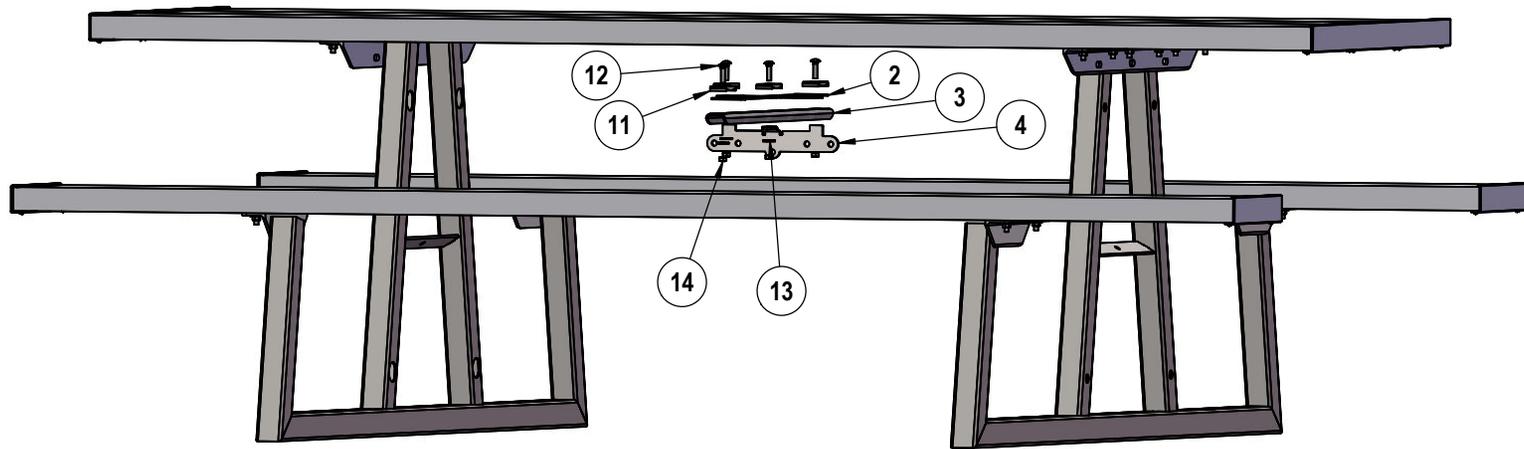


Attach the Wood Table Center Bracket and C-Channel and the Aluminum Planks as shown using specified hardware. Aluminum Clips hang on the inside of the Aluminum Planks.

STEP 3

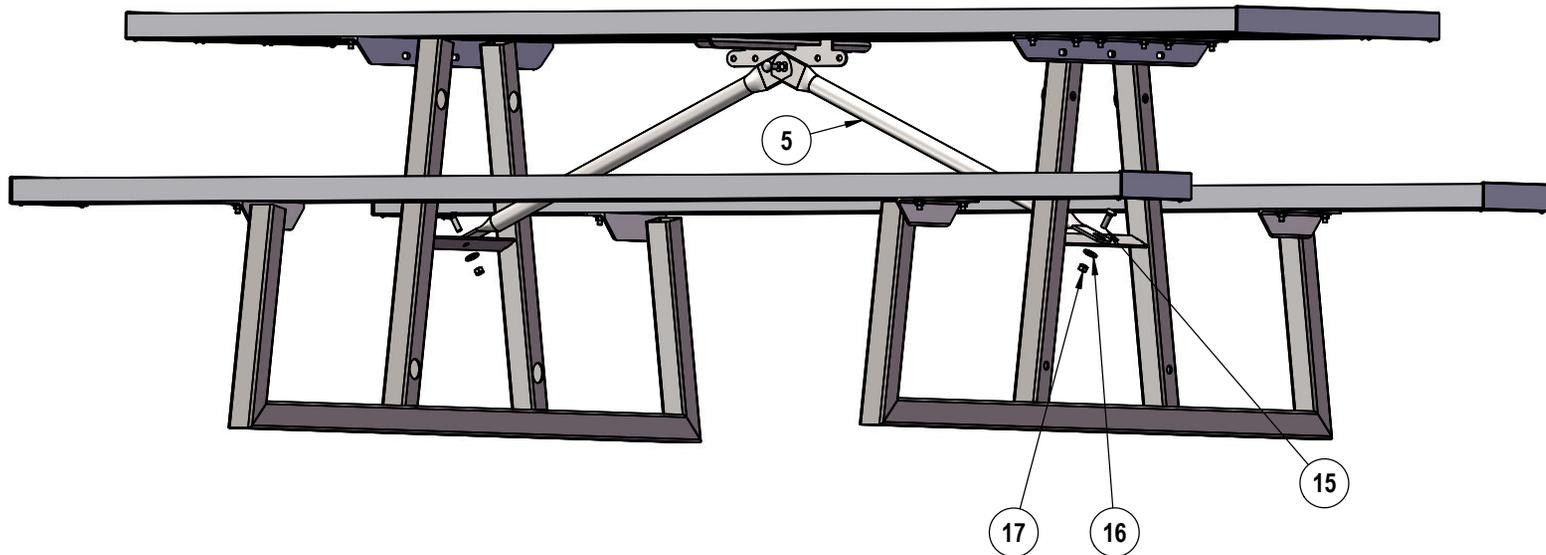

Attach the 31-7/8" Braces to the Wood Center bracket and the legs as shown using specified hardware.

STEP 4

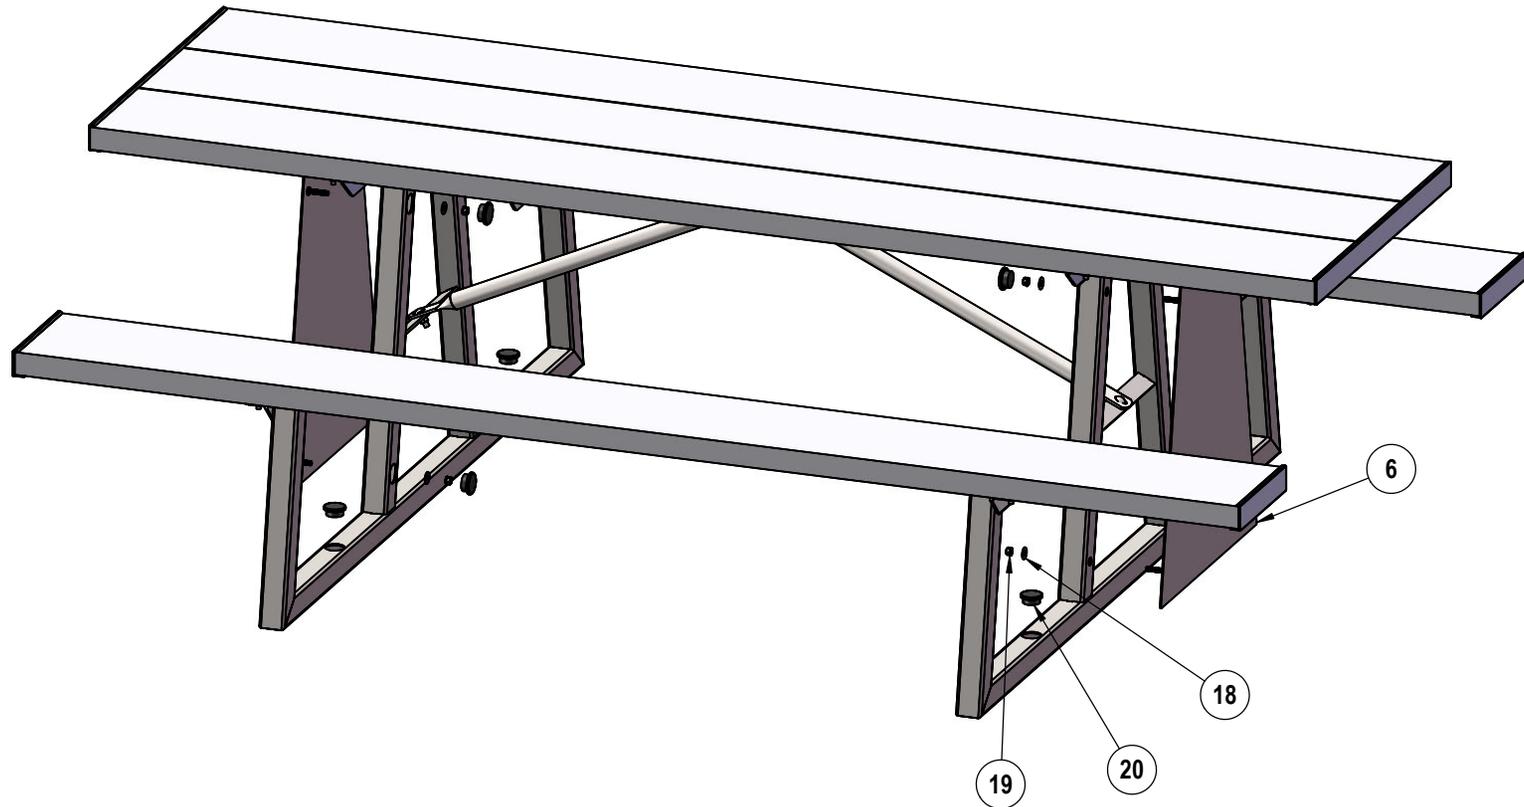

Install item #6 using specified hardware. If surface mounting, insert item #20 after surface mounting and installing item #6

OVERALL DIMENSIONS

