




A **PLAYCORE** Company



Model # 74H-I8

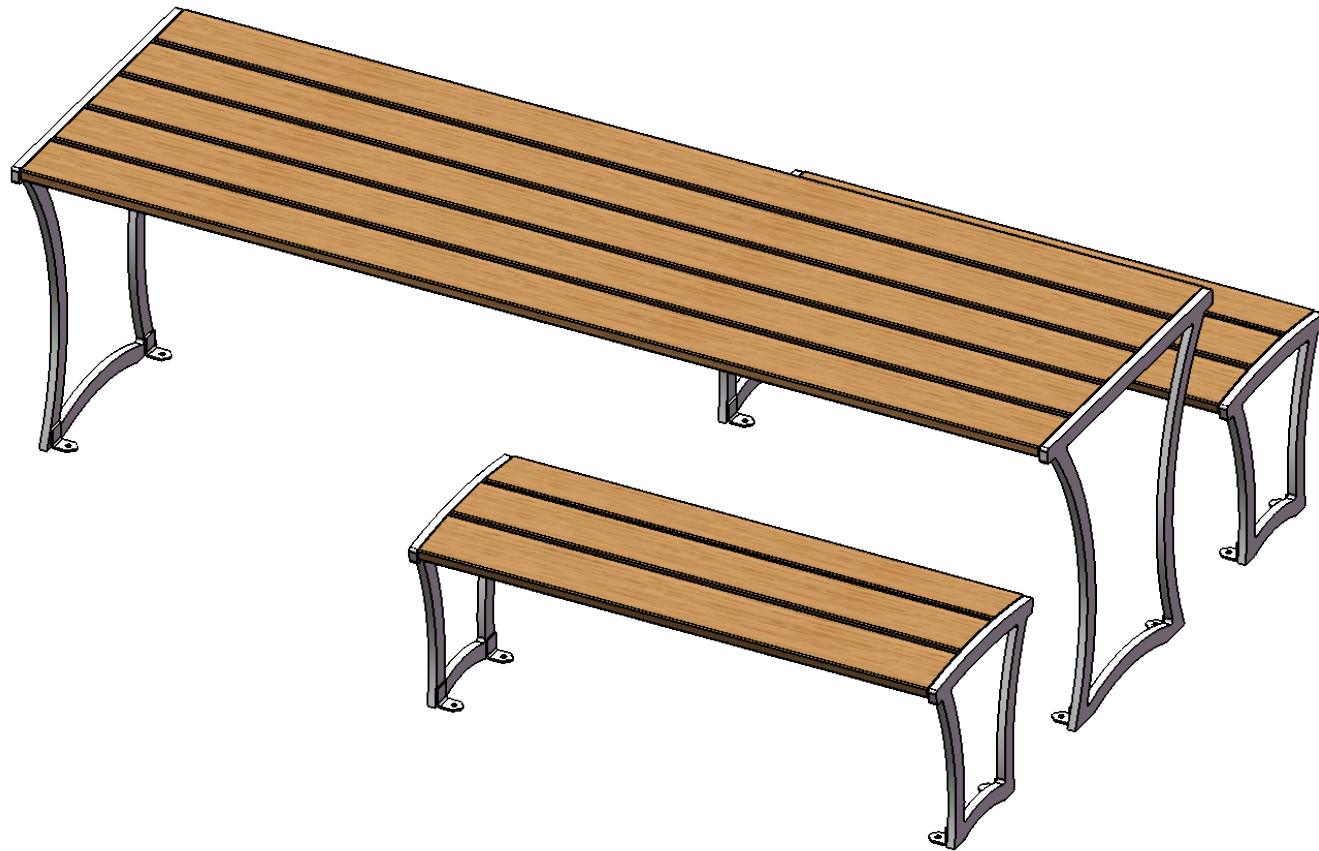

A PLAYCORE Company


SAFETY WARNINGS & EQUIPMENT INSPECTION

- Owners and installers please note these safety warnings and make use of this checklist on a regular basis.
- Follow installation instructions when erecting equipment.
- Ground surfaces around equipment should be restored as needed. Concrete footings should never be exposed. Surface depth should comply with ASTM and CPSC specifications.
- Check for and repair damage caused by wear or vandalism, a major factor in injury causing situations.
- All protruding bolts should be covered or cut off and finished smooth. Sharp edges on pipes should be capped or removed. Check for bent, broken, or severely worn pipe, and replace.
- All equipment should be free of rust and repainted whenever necessary to deter rusting.
- We provide our customers with layout sheets and installation instructions. Please keep on file the specifications sheet that contains the listing of every part used.
- Never add components not intended for use with this product.
- Regular maintenance is necessary in this and all park and recreational equipment to insure the safety of the user.
- Note: Proper maintenance of equipment requires regular tightening of all bolts, nuts, and setscrews.
- Note: Regular checking of all parts, castings, etc. should be made. If a part is broken or worn, it should be replaced immediately.
- Check to be sure all fittings are tight and that bars and pipes do not move.
- Replace all worn S-hooks. S-hooks must be completely closed. Failure to close S-hooks can result in serious injury to the user. NEVER reuse S-hooks.
- Test for free movement of swing hanger and other moving attached parts.
- Check for worn chains and replace them.
- A soft resilient surface should be placed under all swings extending at least twice the height of the top rail both front and back.

HARDWARE



5/16" x 1" Lag Bolt



5/16" Flat Washer

ULTRA SITE PRODUCT SPECIFICATIONS

74H-I8

MADISON IPE WOOD ACCESSIBLE PORTABLE PICNIC TABLE WALK-THROUGH DESIGN

Seat and Top Planks: Seat and Top planks are made from 1-1/4" x 6" Ipe wood. Reinforced with 7 gauge thick support ribs.

Frames: Legs are fabricated from 3/4" steel plate with 7 gauge attachment plates. Mounting plates shall be made from 7 gauge steel. All electrically MIG welded.

Coating: Steel is sandblasted to near white condition. Coated with zinc rich epoxy primer and top coated with electrostatic powder coat, oven cured. Ipe wood is sealed on each end to prevent splitting and stained with a wood finish.

Hardware: Hardware shall be stainless steel.

Dimensions: 8' accessible portable picnic table walk-through design. Seats are 17-3/8" wide x 49 3/4" long. Seat height is 17-3/4" from the ground to the top of the seat. The overall dimensions are 97-3/4" x 69-3/8" x 30"

Recommended Surface Mount Hardware: 3/8" x 3-1/2" Concrete Expansion Anchor Bolts (Not Included)

IPE Wood Care and Maintenance to be applied twice a year.


Step 1.) Wash boards with a deck cleaner or IPE cleaner.

Step 2.) After boards are dry, Lightly sand and dust off boards. Before applying stain be sure wood is dry and free of sawdust or dirt.

Step 3.) Apply a new coat of stain per manufacturer's recommendations. We recommend using Penofin© Hardwood Formula.

COMPONENTS

Attach the Ipe Wood Planks to the Madison Endframes and the Attachment Plates using the specified hardware.

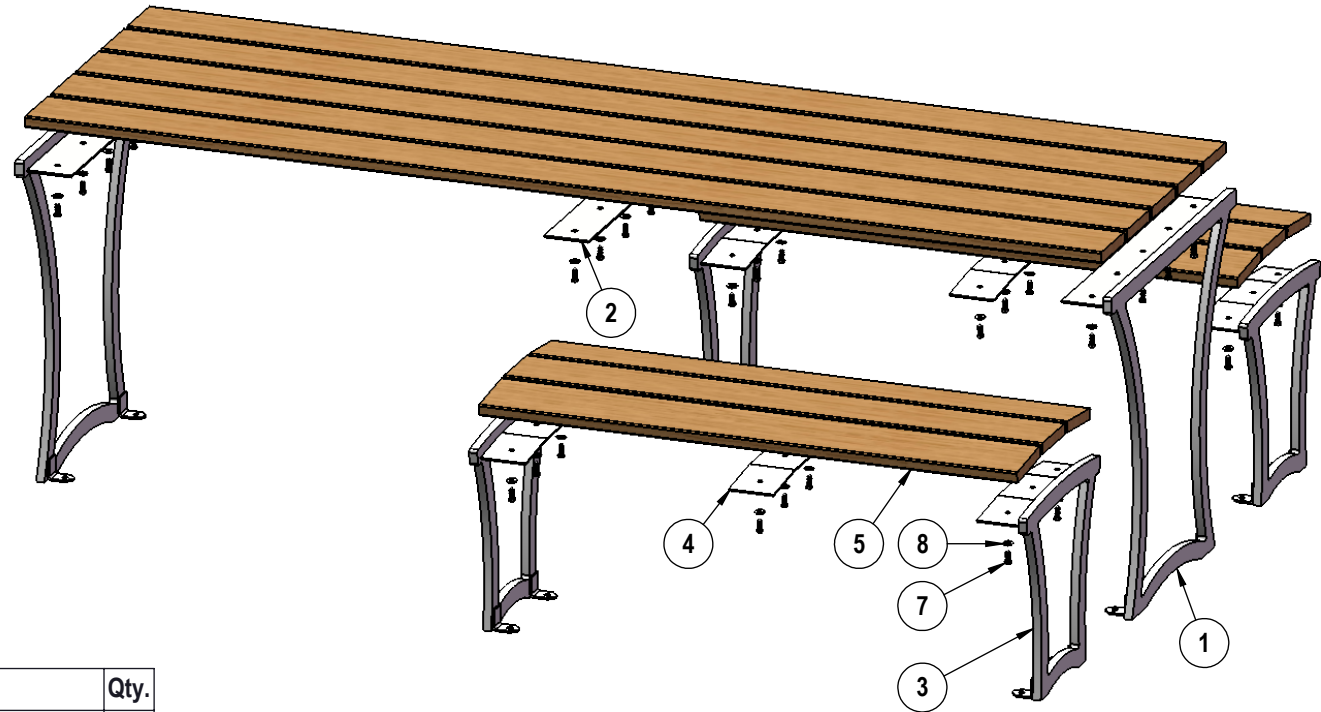

ITEM NO.	PartNo	DESCRIPTION	Qty.
1	01-04-0548	74 wood table endframe	2
2	01-04-0550	74 wood table attachment plate	1
3	01-04-0551	74 wood seat endframe welded	4
4	01-01-0655	madison 71 & 74 wood attachment plate	2
5	01-01-0643	5/4" x 6" x 4' long ipe bench plank	6
6	01-01-0645	5/4" x 6" x 8' long ipe bench plank	5
7	33-05-0067	5/16" x 1" lag bolt, SS	33
8	33-02-0007	5/16" SS Washer	33

WARNING: Overtightening of lag bolts can cause damage to lumber.

OVERALL DIMENSIONS

